



**EVERYTHING -**  
for use with the High-Partition

**Code: 806223182 (MM08.20)**

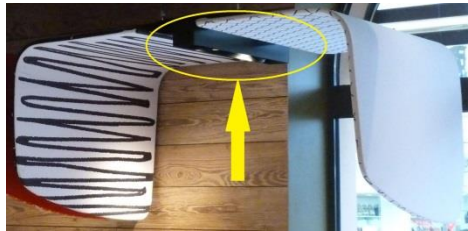

Length: 800mm  
Section: 94x94mm  
Weight: 3,4 kg net.



## Features

Surface mounted or Pendant profile suitable installing under a solid ceiling

- Energy saving
- Full intensity from switch on
- Multiple (2 x) warm white 3.000° K LED nominal 7W
- Low operating temperature
- Long life
- Futureproof LED´s and fully interchangeable
- Integral driver with S.E.L.V. output
- Non-Dimmable (Standard)
- Dimmable on demand

## Electrical Data

### LED DRIVER (each)

Type	constant current
Input voltage	220/240Vac 50/60Hz
Input current	max. 0,16A
cos φ	>0,5

Electrical safety	Class II
Output isolation	S.E.L.V.

LUMINAIRE	
Electrical safety	Class III
Earthed housing	

LEDs	
Power per lighting unit	7 W @ 700 mA
Warm White	2875-3200K

Secondary connection	Top Connector prewired plug and socket to each lighting unit ready to install
----------------------	--

**WARNING**  
Not for TRIAC-based (transistor, thyristor) switching.  
Damage to driver inevitable

## LED

IBL Gen<sup>4</sup> LED lighting unit with CREE XLamp® MHD-E LEDs

Color Temperature CCT:	3000 K
Light Output:	approx. 650 lm per LED

CRI:	≥80
L70 Lifetime:	30 000 h



## Contact

IBL Lighting GmbH  
Christinenstr. 11  
D-40880 Ratingen  
Tel: 02102- 94 20 66 0  
Fax: 02102- 94 20 66 6  
web: [www.ibl.eu](http://www.ibl.eu)  
email: [info@ibl.eu](mailto:info@ibl.eu)

## ECO-Dashboard

