



## EVERYTHING (surface)

Code: 806123183 (MM18.41)

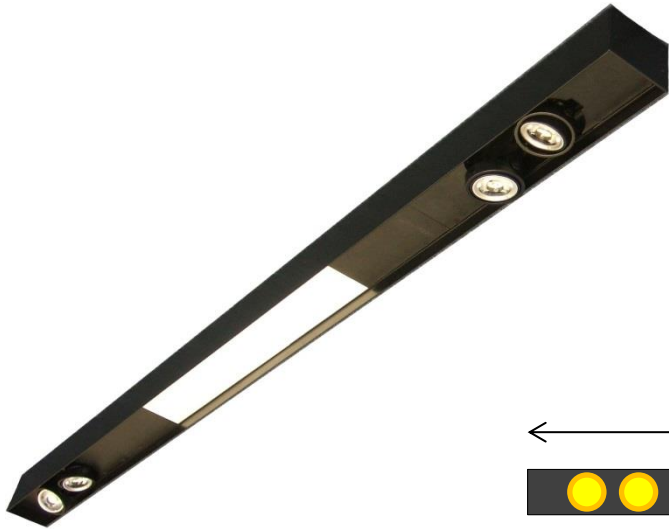

Length: 1800mm  
Section: 94x94mm  
Weight: 7,4 kg net.



### Features

Surface mounted or Pendant profile suitable installing under a solid ceiling

- Energy saving
- Full intensity from switch on
- Multiple (4 x) warm white 3.000K LED nominal 7W
- 1 x LEDtube warm-white 3000K nominal 10W
- Low operating temperature
- Long life
- Futureproof LED's and fully interchangeable
- Integral driver with S.E.L.V. output

Suspension set 1,5m to order  
Code: 806590000 (MMSS15)



### Electrical Data

LED DRIVER (each of 2)

|               |                    |
|---------------|--------------------|
| Type          | constant current   |
| Input voltage | 220/240Vac 50/60Hz |
| Input current | max. 0,16A         |
| cos φ         | 0,8                |

|                   |          |
|-------------------|----------|
| Electrical safety | Class II |
| Output isolation  | S.E.L.V. |

|                   |         |
|-------------------|---------|
| LUMINAIRE         |         |
| Electrical safety | Class I |
| Earthed housing   |         |

|                      |              |
|----------------------|--------------|
| LEDs                 |              |
| Power per LED Module | 7 W @ 700 mA |
| Warm White           | 2875-3200K   |

|                  |       |
|------------------|-------|
| Power of LEDtube | 9 W   |
| Warm White       | 3000K |

|                    |      |
|--------------------|------|
| Overall Power net. | 38 W |
|--------------------|------|

**WARNING**  
Not for TRIAC-based (transistor, thyristor) switching.  
Damage to driver inevitable

### LED

IBL Gen<sup>4</sup> LED lighting unit with CREE XLamp® MHD-E LEDs

|                        |                        |
|------------------------|------------------------|
| Color Temperature CCT: | 3000 K                 |
| Light Output:          | approx. 650 lm per LED |

|               |          |
|---------------|----------|
| CRI:          | ≥80      |
| L70 Lifetime: | 30 000 h |



Philips MASTER LEDtube

|                        |                 |
|------------------------|-----------------|
| Color Temperature CCT: | ≈ 3000 K        |
| Light Output:          | approx. 1000 lm |
| CRI:                   | 83              |
| B50L70 Lifetime:       | 50 000 h        |



### Contact

IBL Lighting GmbH  
Christinenstr. 11  
D-40880 Ratingen  
Tel: 02102- 94 20 66 0  
Fax: 02102- 94 20 66 6  
web: [www.ibl.eu](http://www.ibl.eu)  
email: [info@ibl.eu](mailto:info@ibl.eu)

### ECO-Dashboard

